

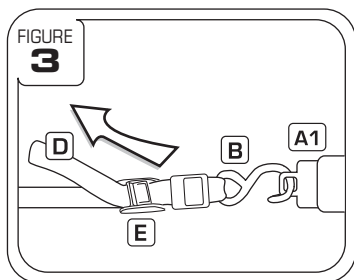
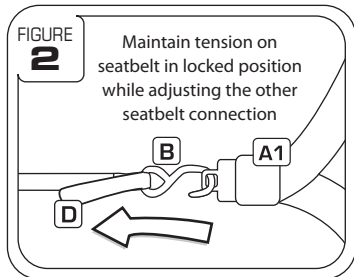
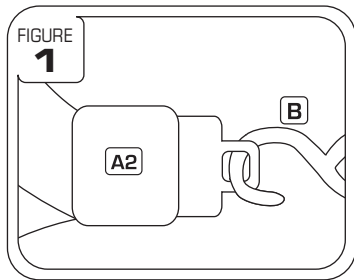



AUTO ZIP LINE - SEAT BELT INSTALLATION INSTRUCTIONS

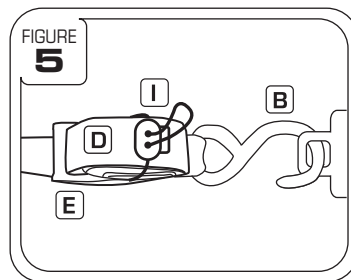

1. Hook the two s-hooks (B) onto the rear passenger seat belt tabs (A1/A2) (See figure 1). The end of the zip line with the cam buckle (E) should be on the driver's side.
2. With your left hand, lock the rear driver's side seat belt in place by swiftly pulling down on the seat belt strap.
3. With right hand, grab extra zip line webbing (D) and apply constant pressure to the extra webbing to ensure that the seat belt stays in the locked position. (see figure 2)
4. With left hand, reach over and lock the passenger seat belt in position using the same swift pulling motion.
5. With the 2 seat belts in the locked position pull on the extra zip line webbing in your right hand to remove all slack from the zip line. (See figure 3)
6. Feed extra webbing (D) through metal slide (K) to secure strap tension. (See figure 4)
7. Roll up extra webbing (D) and secure using bungees & toggle system. (See figure 5)
8. Tug on each seat belt before attaching the dog to ensure they are in the correct locked position. (This should be done before each trip)
9. Place the detachable carabiner (F) onto zip-line (C).
10. Attach the fixed carabiner to the harness D-ring (H).
11. Locate appropriate leash nook (J) that permits Fido to sit up and lay down and loop onto the carabiner (F) attached to the Zip Line.

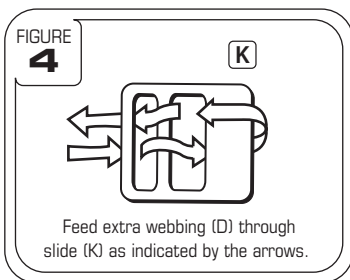

More setup options on reverse side

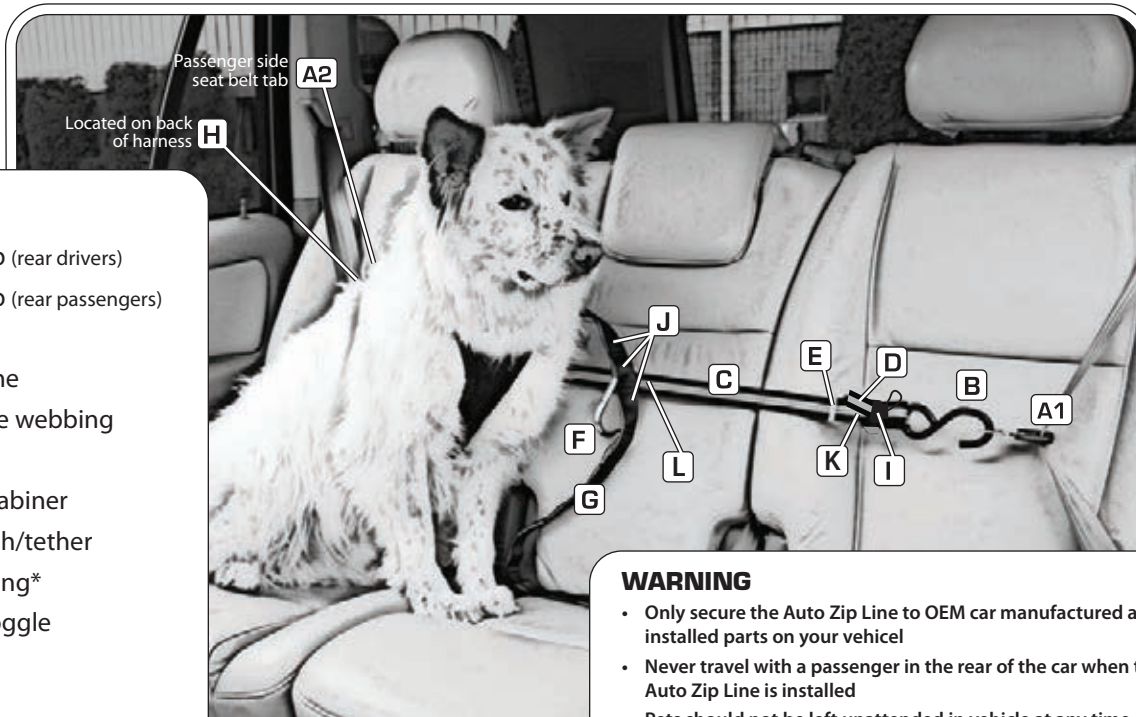

- KEY**
- A1** Seat belt tab (rear drivers)
 - A2** Seat belt tab (rear passengers)
 - B** S-hook
 - C** Nylon zip-line
 - D** Extra zip-line webbing
 - E** Cam buckle
 - F** Zip Line Carabiner
 - G** Wander leash/tether
 - H** Harness D-ring*
 - I** Bungee & toggle
 - J** Leash nook
 - K** Metal slide
 - L** Fixed position center loop

WARNING

- Only secure the Auto Zip Line to OEM car manufactured and installed parts on your vehicle!
- Never travel with a passenger in the rear of the car when the Auto Zip Line is installed
- Pets should not be left unattended in vehicle at any time
- Ensure proper installation of the Zip Line before each trip

*Recommended use with a harness, Tru-Fit Smart Harness sold separately.

AUTO ZIP LINE - ALTERNATE INSTALLATION OPTIONS

fig. 1



Passenger handle installation (fig. 1)

1. Place the two s-hooks (B) onto the rear passenger handles.
2. Tighten the zip line by pulling the extra webbing through the cam buckle.
3. Roll up extra webbing toward cam buckle and secure using bungee & toggle setup.
4. Place the detachable carabiner onto zip line.
5. Attach the fixed carabiner to harness D-ring (A) or seat belt slot (B).
6. Locate appropriate leash nook that permits Fido to sit up and lay down and loop onto carabiner attached to the Zip Line.

fig. 2



Seat belt installation (fig. 2)

1. Buckle seat belt and attach the detachable carabiner.
2. Locate appropriate leash nook that permits Fido to sit up and lay down and loop onto the carabiner attached to the Zip Line.
3. Attach the fixed carabiner to harness D-ring (A) or seat belt slot (B).

fig. 3




Cargo hook installation (fig. 3)

1. Attach the detachable carabiner to cargo hook.
2. Locate appropriate leash nook that permits Fido to sit up and lay down and loop onto the carabiner attached to the cargo hook.
3. Attach the fixed carabiner to harness D-ring (A) or seat belt slot (B).

fig. 4



Zip Line tether doubles as a walking leash. (fig. 4)

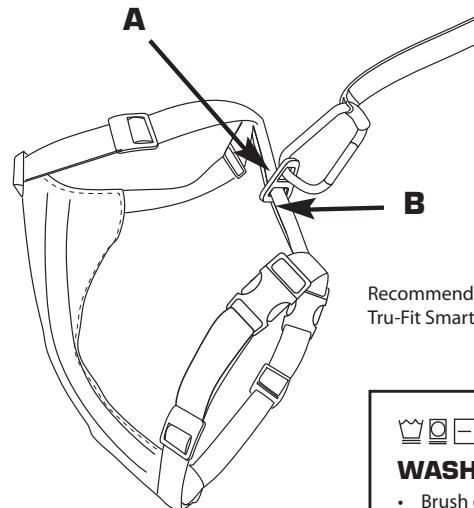

Recommended use with a harness, Tru-Fit Smart Harness sold separately.



WASHING INSTRUCTIONS:

- Brush off loose dirt with a dry brush
- As needed, wipe off with a damp sponge and mild soap
- Rinse only, if possible. Use cold water and a sponge or rinse in a tub without soap
- Rinse thoroughly to eliminate soap residue
- Lay flat to dry



See the complete Dog Travel line at kurgo.com



Become a fan of Kurgo on Facebook and receive all the latest updates, giveaways and contests.