


SHORTY BENCH

SEAT COVER


Instructions and Care

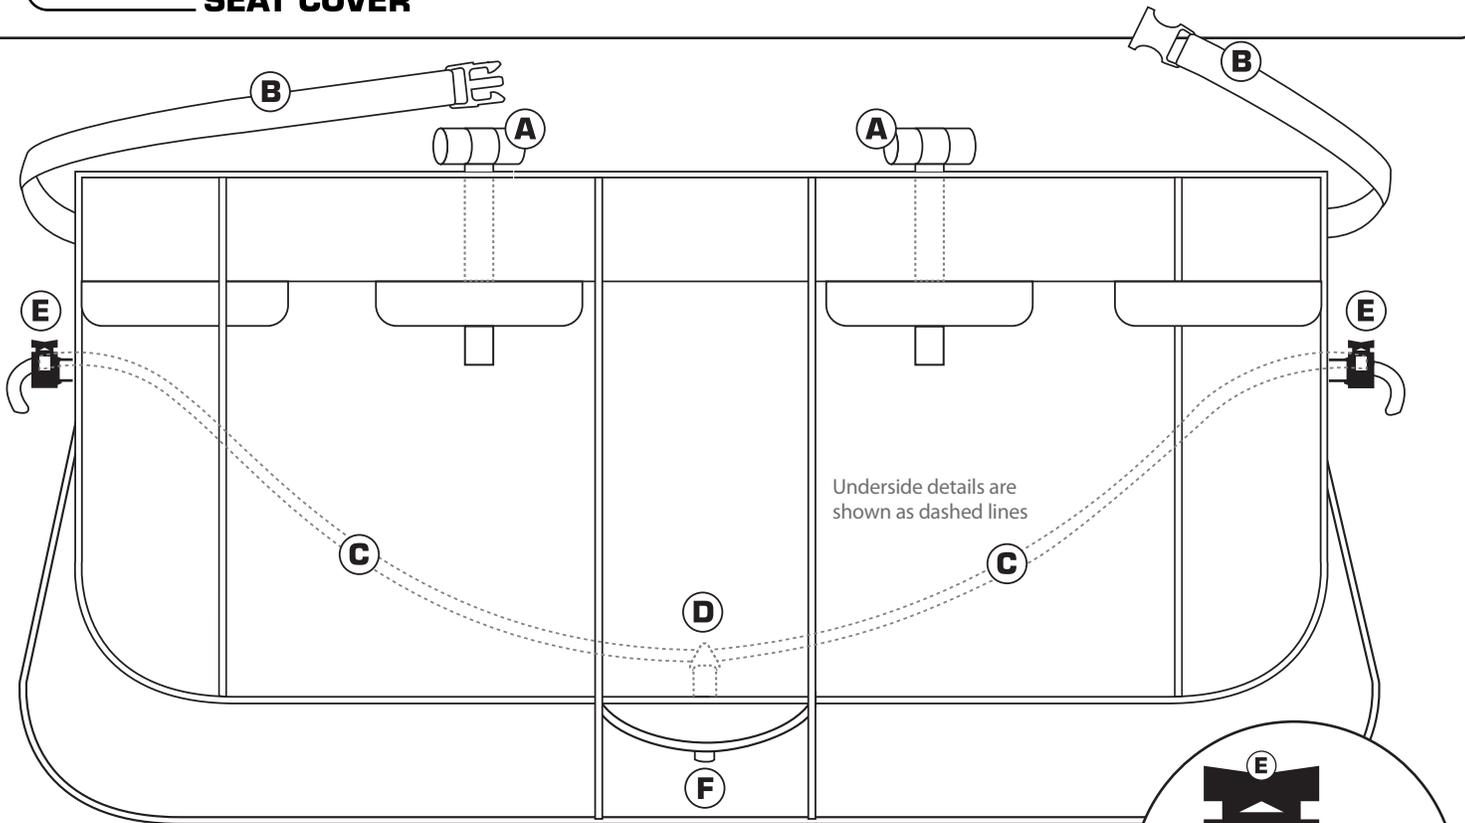

- 1) Insert Plastic Tubing (A) near seat belt closures, push into center seat division. Remove tube straps if not applicable.
- 2) For vehicles with access to the back of the seat, wrap Securing Straps (B) around the sides of the seat and connect in the back. Adjust for snug fit.
- 3) Tuck bungee Cord (C) under the edge of the seat. See Figure 1 and adjust to tighten either end of Cord Lock (E). The under-seat bungee cord simply slips through Triangle (D) and locks to the left and right cord locks.
- 4) Use the Storage Pocket (F) for anything you like! We suggest fun dog stuff!

Figure 1

Push top of Cord Lock (E) down and pull Cord (C) to tighten.



Cleaning Instructions

Our product cleaning instructions will help ensure that your gear has a long, exciting life. In general, washing by hand and hang air-drying is the best way to care for your Kurgo products. However, for the occasions when the mess is too great and time is too tight, we recommend using a washing machine.

Hand Wash Instructions

Note: Recommended for small messes.

1. Brush off loose dirt with a dry brush.
2. Spot clean with a damp sponge, cold water, and mild soap. Avoid harsh detergents.
3. If necessary, rinse larger area to eliminate excess soap residue.
4. Hang to air dry (do not machine dry).

Machine Wash Instructions

Note: Only machine wash gentle in front-loading units (DO NOT use machine with an agitator as it could cause damage not covered under the Kurgo Warranty)

1. Secure all buckles and hardware.
2. Wash with cold water and mild soap. Avoid harsh detergents.
3. Rinse thoroughly to eliminate soap residue.
4. Hang to air dry (do not machine dry).



NOTICE: Please contact Kurgo directly with any product or warranty inquiries.